



HIGH-MADE

弘敏包装——
让精品无处不在

HIGH QUALITY
PACKAGING
MADE FOR WORLD

漳州弘敏机电有限公司
ZHANGZHOU HIGH MADE MACHINERY ELECTRONICS CO., LTD



HIGH-MADE

公司简介

漳州弘敏机电有限公司创立于2008年, 是一家专业为粮食、化工、饲料、食品、盐业等行业提供智能包装系统全套解决方案的高科技型企业。经过十多年的砥砺前行, 公司在全自动真空包装机组和自动化包装生产线的研发、生产和销售领域均取得了突破性的进步, 已累计为全国23个省市的上千用户创造价值, 是中粮、益海嘉里、北大荒等国内知名企业的重要战略合作伙伴。

公司一贯重视产品质量和技术创新, 拥有一批长期从事真空及自动化包装系统开发的专业技术人才, 不断研发出多款稳定高效的新产品, 目前, 公司主要产品有六面真空整形包装机组和两面真空整形包装机组两大类, 细化为全自动无人包装机组及半自动包装单机以适应不同客户, 主要为粮食行业的大米、杂粮等产品提供真空保鲜服务, 并可根据客户的现场为客户提供自动化生产线的成套设计、制作及安装服务。

弘敏机电上下齐心, 始终秉承品质、创新、服务之理念, 严格按照ISO9001: 2015质量管理体系运作, 在公司内部已形成生产精益化、管理规范化、服务专业化的生产经营模式。注重品质为先, 服务至上之原则, 已构建完善的售前及售后服务网络, 未来的弘敏机电将不断发挥自身技术优势, 顺应包装行业趋势, 继往开来, 在中国制造2025规划的引导下向人工智能方面不断前进, 继续为广大用户提供更优质可靠的产品及更专业完美的服务。

漳州弘敏机电有限公司

Zhangzhou High Made Machinery Electronics Co., Ltd

以精品塑造名牌
以创新发展品牌



核心价值观

以人为本、以精品回报客户

企业精神

求实、团结、创新、高效

企业目标

打造国际一流智能包装品牌

经营宗旨

为顾客创造价值

企业作风

一丝不苟、精益求精

市场观

客户至上

质量观

品质就是生命

产品就是人品

品牌观

以精品塑造名牌

以创新发展品牌

合作观

快乐伙伴 合作共赢

HIGH MADE PACKING MACHINE **HIGH QUALITY MADE IN CHINA**

Company Profile

Zhangzhou High Made Machinery Electronics Co., Ltd specializes in the manufacture, R&D and technology improvement for the packing machines. With more than 20 years of technological experience and 11 years of company development, High Made packing machines have grown much stronger and the product range covers full-auto and semi-auto vacuum packing machines, rice packing machines, granule packing machines, snack packing machines, quantitative packing scales and so on.

We focus on the Innovation of both product and technology and got a professional talent group who works on the vacuum and automatic packing system research for long. We provide not only the vacuum fresh keeping service but also the complete design, production and installation for the automatic production lines to our customers. High Made packing machines are widely used in varies of industries like grains, rice, seeds, chopped peanuts, cashews, coffee beans, flour, sugar, salt, snacks, and chemical granules etc.

Based on the good quality and service, High Made packing machines have won the good reputations from not only our Chinese customers but also overseas like Southeast Asia, South America, Middle East and Africa. We will keep improving and forge ahead based on our technology advantages to provide the better and better products and service to our customers. And looking forward to building a win-win business relationship with you!



漳州弘敏机电有限公司

Zhangzhou High Made Machinery Electronics Co., Ltd

公司荣誉

COMPANY HONORS



专利证书 PATENTS

- | | |
|---------------------|---------------------|
| ZL 2009 2 0139329.0 | ZL 2013 2 0525288.5 |
| ZL 2009 2 0139330.3 | ZL 2013 2 0525290.2 |
| ZL 2009 2 0139331.8 | ZL 2013 2 0525291.7 |
| ZL 2009 2 0139484.2 | ZL 2013 2 0525555.9 |
| ZL 2009 2 0139485.7 | ZL 2017 2 0277958.4 |
| ZL 2009 2 0139486.1 | ZL 2017 2 0277959.9 |
| ZL 2013 2 0525069.7 | ZL 2017 2 0277966.9 |
| ZL 2013 2 0525070.X | ZL 2017 2 0278376.8 |
| ZL 2013 2 0525286.6 | ZL 2017 2 0471106.9 |
| ZL 2013 2 0525287.0 | |



WORKSHOPS 车间一角

HIGH-MADE

AMVP-05A/05H




全自动六面真空整形包装机

FULL AUTO VACUUM PACKING MACHINE




技术参数 SPECIFICATIONS

电 源 Power Supply	工作温度 Working Temp	耗气量 Air Consumption	计量方式 Measurement	分度值 Division Value
AC380V三相四线制, 4.5Kw	-10-40°C相对湿度: <90% -10-40°C Relative humidity: <90%	压缩空气 0.84m³/MIN	高精度电子定量秤 high-accurate electronic scale	1g
适用包装材料 Available Packaging Material	相对真空度 Relative Vacuum Degree	包装范围 Packing Range	包装速度 Packing Capacity (包/小时 bags/hour)	外形尺寸 Overall Dimension
定制复合膜包装袋 poly bag	-0.06-0.08Mpa	0.25-5KG	550-650	2260×2925×2500mm



BUCKET FLANGE DIMENSION

设备结构图
Structure Drawing

性能特点:

- 1) 集成自动上袋、供袋、计量、灌料、整形、真空及成品输出为一体
- 2) 采用多袋库形式, 缺袋自动切换袋库机报警提示
- 3) 高精度振动控制模式, 每包误差可控制在±2g范围内
- 4) 底部吸袋机构, 上袋更可靠
- 5) 真空包装, 贮存期长, 保鲜防腐, 外观精美

Characteristics:

- 1) Integrated with full automated bagging, measuring, filling, shaping, vacuating, and product conveying.
- 2) With multi bag trays which will auto shift and warn against lack of bag.
- 3) With high-accurate vibration control mode to make the packing error within ±2g.
- 4) Pick the bag from the bottom position to make it more reliable.
- 5) The vacuum packing achieves the long storage, fresh-keeping and good-looking.



适用范围:

适用于化工(化肥)、五谷杂粮、饲料、食品、盐业中等小颗粒状物料的六面真空定型装包。




Application:

Apply to the brick-shape packaging for small granules like grains, rice, feeds, seeds, beans, peanuts, food, salt, chemical fertilizer etc.

DCS-5F60N

高速六面真空整形包装机

HIGH SPEED VACUUM PACKING MACHINE

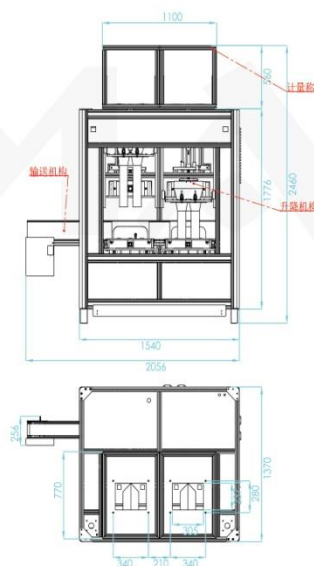

技术参数 SPECIFICATIONS

电 源 Power Supply	工作温度 Working Temp	耗气量 Air Consumption	计量方式 Measurement	分度值 Division Value
AC380V三相四线制, 4Kw	-10-40℃相对湿度: <90% -10-40℃ Relative humidity: <90%	压缩空气 0.8m³/MIN	高精度电子定量秤 high-accurate electronic scale	1g
适用包装材料 Available Packaging Material	相对真空度 Relative Vacuum Degree	包装范围 Packing Range	包装速度 Packing Capacity (包/小时 bags/hour)	外形尺寸 Overall Dimension
定制复合膜包装袋 poly bag	-0.06-0.08Mpa	0.25-5KG	0.2-1.5KG: 1200; 2.0-5KG: 500-800	2065×1370×2460mm

设备结构图
Structure Drawing

性能特点:

- ① 高精度振动控制模式, 每包误差可控制在±2g范围内
- ② 真空包装, 贮存期长, 保鲜防腐, 外观精美
- ③ 可以单人或双人一起上袋工作, 大大提高工作效率
- ④ 小包装一次可以出四个成型料砖
- ⑤ 集计量、灌料、整形、真空及成品输出为一体全部自动完成

Characteristics:

- 1) With high-accurate vibration control mode to make the packing error within ±2g.
- 2) The vacuum packing achieves the long storage, fresh-keeping and good-looking.
- 3) Available for one or two people for bagging to greatly increase the working efficiency.
- 4) It will produce four bags at one time for small bag packing.
- 5) Integrated with full automated measuring, filling, shaping, vacuating, and product conveying.



适用范围:

适用于化工(化肥)、五谷杂粮、饲料、食品、盐业中等小颗粒状物料的六面真空定型装包。

Application:

Apply to the brick-shape packaging for small granules like grains, rice, feeds, seeds, beans, peanuts, food, salt, chemical fertilizer etc.

DCS-5F60A/DCS-5F60K**半自动双工位六面真空整形包装机**

VACUUM PACKING MACHINE WITH DOUBLE STATIONS FOR BRICK SHAPE

**适用范围:**

适用于化工（化肥）、五谷杂粮、饲料、食品、盐业中等小颗粒状物料的六面真空定型装包，特别是DCS-5F60A适用于狗粮、猫砂等宠物料的真空整形包装。

Application:

Apply to the brick-shape packaging for small granules like grains, rice, feeds, seeds, beans, peanuts, food, salt, chemical fertilizer etc.

**技术参数 SPECIFICATIONS**

电 源 Power Supply	工作温度 Working Temp	耗气量 Air Consumption	计量方式 Measurement	分度值 Division Value
AC380V三相四线制, 2.5Kw	-10-40℃相对湿度: <90% -10-40℃ Relative humidity: <90%	压缩空气 0.41~0.5m³/MIN	高精度电子定量秤 high-accurate electronic scale	1g
适用包装材料 Available Packaging Material	相对真空度 Relative Vacuum Degree	包装范围 Packing Range	包装速度 Packing Capacity (包/小时 bags/hour)	外形尺寸 Overall Dimension
定制复合膜包装袋 poly bag	-0.06-0.08Mpa	0.25-5KG	60A: 500-550 60K 0.25-1.5KG: 500-800 60K 2.0-5KG: 500-550	2290×1370×2300mm

性能特点:

- ① 高精度振动控制模式，每包误差可控制在±2g范围内
- ② 真空包装，贮存期长，保鲜防腐，外观精美
- ③ 适用于狗粮、猫砂等宠物料的真空整形包装
- ④ 集计量、灌料、整形、真空及成品输出为一体全部自动完成

Characteristics:

- 1) With high-accurate vibration control mode to make the packing error within ±2g.
- 2) The vacuum packing achieves the long storage, fresh-keeping and good-looking.
- 3) Especially applicable to the pet food packaging like dog food, cat litter and so on.
- 4) Integrated with full automated measuring, filling, shaping, vacuating, and product conveying.

DCS-5F8B**单工位双料半自动六面真空整形包装机**

VACUUM PACKING MACHINE WITH SINGLE STATION FOR BRICK SHAPE

**适用范围:**

适用于化工（化肥）、五谷杂粮、饲料、食品、盐业中等小颗粒状物料的六面真空定型装包。

Application:

Apply to the brick-shape packaging for small granules like grains, rice, feeds, seeds, beans, peanuts, food, salt, chemical fertilizer etc.

**技术参数 SPECIFICATIONS**

电 源 Power Supply	工作温度 Working Temp	耗气量 Air Consumption	计量方式 Measurement	分度值 Division Value
AC380V三相四线制, 2Kw	-10-40℃相对湿度: <90% -10-40℃ Relative humidity: <90%	压缩空气 0.4m³/MIN	高精度电子定量秤 high-accurate electronic scale	1g
适用包装材料 Available Packaging Material	相对真空度 Relative Vacuum Degree	包装范围 Packing Range	包装速度 Packing Capacity (包/小时 bags/hour)	外形尺寸 Overall Dimension
定制复合膜包装袋 poly bag	相对真空度 -0.06-0.08Mpa relatively -0.06-0.08Mpa	0.25-5KG	0.2-1.5KG: 600 2.0-5KG: 250-400	1760×1255×2410mm

性能特点:

- ① 高精度振动控制模式，每包误差可控制在±2g范围内
- ② 真空包装，贮存期长，保鲜防腐，外观精美
- ③ 外形小巧，外观精美，适用于工厂位置比较极限，产量中等的企业
- ④ 小包装一次可以出两个成型料砖
- ⑤ 集计量、灌料、整形、真空及成品输出为一体全部自动完成

Characteristics:

- 1) With high-accurate vibration control mode to make the packing error within ±2g.
- 2) The vacuum packing achieves the long storage, fresh-keeping and good-looking.
- 3) The machine is small and beautiful and applicable to the plants whose area and production capacity is not big.
- 4) It will produce two bags at one time for small bag packing.
- 5) Integrated with full automated measuring, filling, shaping, vacuating, and product conveying.

DCS-10F7S/DCS-10F7N

两面六面真空整形包装一体机

VACUUM PACKING MACHINE FOR BOTH FLAT AND BRICK SHAPE

适用范围:

适用于化工(化肥)、五谷杂粮、饲料、食品、盐业中等小颗粒状物料的两面、六面真空定型装包。

Application:

Apply to both flat and brick shape packaging for small granules like grains, rice, feeds, seeds, beans, peanuts, food, salt, chemical fertilizer etc.



技术参数 SPECIFICATIONS

电 源 Power Supply	工作温度 Working Temp	耗气量 Air Consumption	计量方式 Measurement	分度值 Division Value
AC380V三相四线制, 4.5Kw	-10-40℃相对湿度: <90% -10-40℃ Relative humidity: <90%	压缩空气 0.25-0.58m³/MIN	高精度电子定量秤 high-accurate electronic scale	1g
适用包装材料 Available Packaging Material	相对真空度 Relative Vacuum Degree	包装范围 Packing Range	包装速度 Packing Capacity (包/小时 bags/hour)	外形尺寸 Overall Dimension
定制复合膜包装袋 poly bag	-0.06-0.08Mpa	两面 0.5-10KG 六面 0.2-1.5KG; flat-shape 0.5-10KG; brick-shape 0.25-5KG	7S两面flat shape: ≤260; 7S六面 brick shape: 280-500; 7N两面flat shape: ≤260; 7N六面brick shape: 0.2-1.5KG 400-500; 2.0-5KG ≤280	2095×1382×2372mm

性能特点:

- ① 高精度振动控制模式, 每包误差可控制在±2g范围内
- ② 真空包装, 贮存期长, 保鲜防腐, 外观精美
- ③ 三秤头, 单人操作, 两面六面同时包装
- ④ 六面小包装一次可以出两个成型料砖

Characteristics:

- 1) With high-accurate vibration control mode to make the packing error within ±2g.
- 2) The vacuum packing achieves the long storage, fresh-keeping and good-looking.
- 3) With three scales and it needs only one person to handle with the flat and brick shape packing.
- 4) It will produce two bags at one time for small brick-shape bag packing.

KZX-10

多工位两面真空整形包装机

VACUUM PACKING MACHINE WITH MULTISTATIONS FOR FLAT SHAPE

适用范围:

适用于化工(化肥)、五谷杂粮、饲料、食品、盐业中等小颗粒状物料的真空定型装包。

Application:

Apply to the flat-shape packaging for small granules like grains, rice, feeds, seeds, beans, peanuts, food, salt, chemical fertilizer etc.



技术参数 SPECIFICATIONS

电 源 Power Supply	工作温度 Working Temp	耗气量 Air Consumption	计量方式 Measurement	分度值 Division Value
AC380V三相四线制, 5Kw	-10-45℃相对湿度: <90% -10-45℃ Relative humidity: <90%	压缩空气 0.28-0.66m³/MIN	高精度电子定量秤 high-accurate electronic scale	1g
适用包装材料 Available Packaging Material	相对真空度 Relative Vacuum Degree	包装范围 Packing Range	包装速度 Packing Capacity (包/小时 bags/hour)	外形尺寸 Overall Dimension
定制复合膜包装袋 poly bag	-0.06-0.08Mpa	2.5-10KG	500-700	1865×3540×2330mm

性能特点:

- ① 高精度振动控制模式, 每包误差可控制在±2g范围内
- ② 真空包装, 贮存期长, 保鲜防腐, 外观精美
- ③ 配套丰富, 适用任何电子秤配套组线
- ④ 操作简单, 效率高, 单人操作, 高速循环多工位, 抽真空、整形及成品输出一条线
- ⑤ 单独整形, 国内首创, 成品舒展, 美观大方, 流通便捷, 携带方便

Characteristics:

- 1) With high-accurate vibration control mode to make the packing error within ±2g.
- 2) The vacuum packing achieves the long storage, fresh-keeping and good-looking.
- 3) It is able to match with any scale lines.
- 4) Easy for operation, multi stations run in cycle to highly increase the working efficiency; it needs only one person for bagging work and the vacuating, shaping and the product conveying will be finished automatically.
- 5) The shaping will be done individually which is the unique design in China.

DCS-10F6

单工位两面真空整形包装机

VACUUM PACKING MACHINE WITH SINGLE STATION FOR FLAT SHAPE



适用范围:

适用于化工（化肥）、五谷杂粮、饲料、食品、盐业中等小颗粒状物料的真空定型装包。

Application:

Apply to the flat-shape packaging for small granules like grains, rice, feeds, seeds, beans, peanuts, food, salt, chemical fertilizer etc.



技术参数 SPECIFICATIONS

电 源 Power Supply	工作温度 Working Temp	耗气量 Air Consumption	计量方式 Measurement	分度值 Division Value
AC380V三相四线制, 2Kw	-10-40℃相对湿度: <90% -10-40℃ Relative humidity: <90%	压缩空气 0.25m³/MIN	高精度电子定量秤 high-accurate electronic scale	1g
适用包装材料 Available Packaging Material	相对真空度 Relative Vacuum Degree	包装范围 Packing Range	包装速度 Packing Capacity (包/小时 bags/hour)	外形尺寸 Overall Dimension
定制复合膜包装袋 poly bag	-0.06-0.08Mpa	0.5-10KG	260	856×1382×2370mm

性能特点:

- ① 高精度振动控制模式, 每包误差可控制在±2g范围内
- ② 真空包装, 贮存期长, 保鲜防腐, 外观精美
- ③ 外形小巧, 外观精美, 适用于工厂位置比较极限, 产量中等的企业

Characteristics:

- 1) With high-accurate vibration control mode to make the packing error within ±2g.
- 2) The vacuum packing achieves the long storage, fresh-keeping and good-looking.
- 3) The machine is small and beautiful and applicable to the plants whose area and production capacity is not big.

DCS-10F6S

双工位两面真空整形包装机

VACUUM PACKING MACHINE WITH DOUBLE STATIONS

正面
Front Side背面
Rear Side

适用范围:

适用于化工（化肥）、五谷杂粮、饲料、食品、盐业中等小颗粒状物料的真空定型装包。

Application:

Apply to the flat-shape packaging for small granules like grains, rice, feeds, seeds, beans, peanuts, food, salt, chemical fertilizer etc.



技术参数 SPECIFICATIONS

电 源 Power Supply	工作温度 Working Temp	耗气量 Air Consumption	计量方式 Measurement	分度值 Division Value
AC380V三相四线制, 4Kw	-10-40℃相对湿度: <90% -10-40℃ Relative humidity: <90%	压缩空气 0.25-0.58m³/MIN	高精度电子定量秤 high-accurate electronic scale	2g
适用包装材料 Available Packaging Material	相对真空度 Relative Vacuum Degree	包装范围 Packing Range	包装速度 Packing Capacity (包/小时 bags/hour)	外形尺寸 Overall Dimension
定制复合膜包装袋 poly bag	-0.06-0.08Mpa	1.5-10KG	450-550	3049x1854x2479mm

性能特点:

- ① 高精度振动控制模式, 每包误差可控制在±2g范围内
- ② 真空包装, 贮存期长, 保鲜防腐, 外观精美
- ③ 双工位单人操作, 效率高

Characteristics:

- 1) With high-accurate vibration control mode to make the packing error within ±2g.
- 2) The vacuum packing achieves the long storage, fresh-keeping and good-looking.
- 3) Double working stations with one person to operate, high working efficiency.

DCS-MH**微量双体分装机**
MICRO PACKING MACHINE**适用范围:**

适用于化工（化肥）、五谷杂粮、饲料、食品、盐业中等小颗粒状物料、片状物料的装包。

Application:

Apply to the bag packing for small granules and flap materials like grains, rice, feeds, seeds, beans, peanuts, food, salt, chemical fertilizer etc.

**技术参数 SPECIFICATIONS**

电 源 Power Supply	工作温度 Working Temp	耗气量 Air Consumption	计量方式 Measurement
AC220V, 0.15Kw	-10-40℃相对湿度: <90% -10-40℃ Relative humidity: <90%	压缩空气0.02m³/MIN	高精度电子定量秤 high-accurate electronic scale
分度值 Division Value	包装范围 Packing Range	包装速度 Packing Capacity (包/小时 bags/hour)	
2g	0.1-5KG	600-900	

性能特点:

- ① 高精度振动控制模式，每包误差可控制在±2g范围内
- ② 单人操作，外观小巧，占地面积小

Characteristics:

- 1) With high-accurate vibration control mode to make the packing error within ±2g.
- 2) It needs only one person to operate and just occupies a small space.

DCS-25HZ**双工位两面真空整形包装机**
ELECTRONIC PACKING SCALE**适用范围:**

适用于化工（化肥）、五谷杂粮、饲料、食品、盐业中等小颗粒状物料的真空定量装包。

Application:

Apply to the quantitative packing for kinds of granules like grains, rice, feeds, seeds, beans, peanuts, food, salt, chemical fertilizer etc.

技术参数 SPECIFICATIONS

型号 Model	额定装包重量 Rated weight(kg)	分度值 Division Value(g)	装包精度 Accuracy(F.S)	装包速度 (bags/h)Speed	耗电量 Power	耗气量 Air
DCS10	1-10	2	0.1%	300-420	AC220V 150W	0.5-0.8Mpa 1m³/h
DCS25	10-25	5	0.1%	300-600		
DCS50	10-50	10	0.1%	300-420		

性能特点:

- ① 高精度振动控制模式，每包误差可控制在±2g范围内
- ② 包装范围大，适用范围广

Characteristics:

- 1) With high-accurate vibration control mode to make the packing error within ±2g.
- 2) Very wide packing range and application range.

S988

简易两面真空整形包装机

SIMPLE VACUUM PACKING MACHINE FOR FLAT SHAPE



适用范围:

适用于化工(化肥)、五谷杂粮、饲料、食品、盐业中等小颗粒状物料的真空定型装包。

Application:

Apply to the flat-shape packaging for small granules like grains, rice, feeds, seeds, beans, peanuts, food, salt, chemical fertilizer etc.

技术参数 SPECIFICATIONS

电 源 Power Supply	工作温度 Working Temp	耗气量 Air Consumption	适用包装材料 Available Packaging Material
AC220V, 2Kw	-10-40℃相对湿度: <90% -10-40℃ Relative humidity: <90%	压缩空气0.02m³/MIN	定制复合膜包装袋 poly bag
相对真空度 Relative Vacuum Degree	包装范围 Packing Range	包装速度 Packing Capacity (包/小时 bags/hour)	
-0.06-0.08Mpa	2-5KG	150-200	

性能特点:

- ① 单人操作, 外观小巧, 占地面积小
- ② 具有二次整形功能
- ③ 采用一键式启动形式, 操作简单

Characteristics:

- 1) It needs only one person to operate and just occupies a small space.
- 2) With the second-time shaping function.
- 3) Adopt the one-key start mode, easy to operate.

HM8S

给袋式包装机

FOOD PACKING MACHINE



适用范围:

适用于食品、粮食、化工等。

Application:

Apply to the quantitative packing for kinds of granules like grains, rice, feeds, seeds, beans, peanuts, food, salt, chemical fertilizer etc.

适用袋型:

四边封袋、三边封袋、自立袋、手提袋、拉链袋、有盖塑料袋、纸塑料等。

Application Bags:

Four-side sealed pouch, three-side sealed pouch, stand-up pouch, hand pouch, zipper pouch, polybag with cap, paper pouch etc.

技术参数 SPECIFICATIONS

电 源 Power Supply	工作温度 Working Temp	耗气量 Air Consumption	适用包装材料 Available Packaging Material
AC380V, 2.5Kw	-10-40℃相对湿度: <90% -10-40℃ Relative humidity: <90%	压缩空气0.2m³/MIN	定制复合膜包装袋 poly bag
相对真空度 Relative Vacuum Degree	包装范围 Packing Range	包装速度 Packing Capacity (包/小时 bags/hour)	
-0.06-0.08Mpa	0.01-1.5KG	1500-2700	

性能特点:

- ① 集成自动上袋、供袋、计量、灌料及成品输出为一体
- ② 高精度振动控制模式, 每包误差可控制在±2g范围内
- ③ 适用包装的物品种类多, 应用广泛

Characteristics:

- 1) Integrated with full automated bagging, bag giving, measuring, filling, and product conveying.
- 2) With high-accurate vibration control mode to make the packing error within ±2g.
- 3) Very wide application range.

BM-700A**智能自动装箱机**INTELEAGENT AUTO BOX
FILLING MACHINE

适用范围:

适用于各种普通规格的两面六面成品的装箱。

Application:

Apply to the box filling for the flat and brick shape of bags in kinds of dimensions.

技术参数 SPECIFICATIONS


电 源 Power Supply	工作温度 Working Temp	耗气量 Air Consumption	包装范围 Packing Range	包装速度 Packing Capacity (包/小时 bags/hour)
AC380V 三相四线制, 2Kw	-10-40℃相对湿度: <90% -10-40℃ Relative humidity: <90%	压缩空气1m³/MIN	2-10KG	≤700

性能特点:

- ① 集成自动开箱袋、装箱、封口及成品输出为一体
- ② 双工位共同装箱, 效率高
- ③ 采用真空负压吸包, 精准装包, 失包报警提示


Characteristics:

- 1) Integrated with full automated box opening, box filling, box sealing, and conveying.
- 2) Double working stations will run at the same time to achieve the high efficiency.
- 3) Adopt the vacuum negative pressure to suck the bags to ensure a high filling success rate, with the warning function for bag loss.

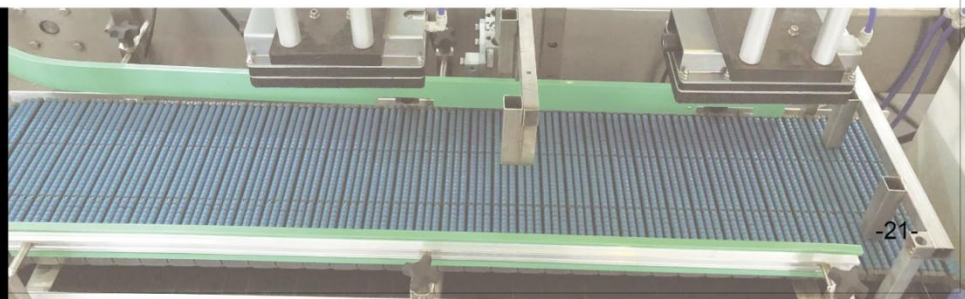



我们的展会 OUR EXHIBITIONS

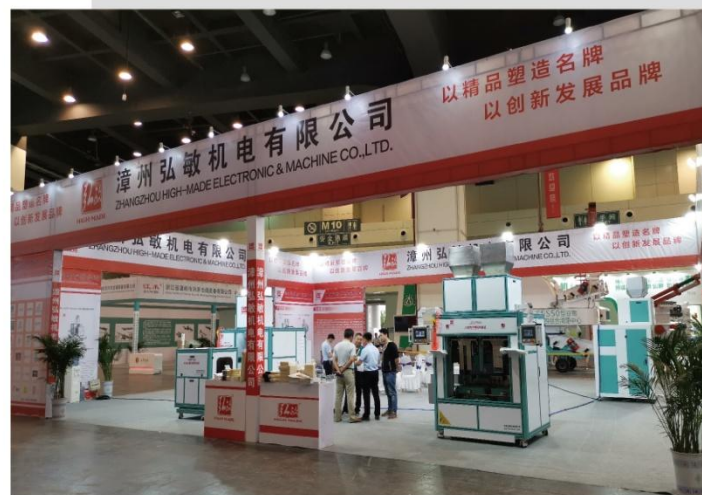

BUSINESS PARTNERS



PROJECTS

Zhangzhou High Made Machinery Electronics Co., Ltd



售后服务

OUR SERVICE

服务第一 · 品质至上

用心 贴心 专心

Pre-sales service:

1. Inquiry and consulting support
2. Sample testing support
3. Factory and showroom view

After-sales service:

1. Training how to install the machine
2. Training how to use the machine
3. Engineers available to service machinery overseas
4. Lifespan technical support and service by free

We provide one-year warrantee to make sure your machine runs consistently. We always keep certain inventory level of spare parts, which means the replacements can be shipped to you right away.

漳州弘敏机电有限公司

地 址：福建省漳州市蓝田开发区鹤鸣路22号 /

电 话：0596-6175566/6175588 / 传 真：0596-6180906 /

邮 件：scale@high-made.com / 网 址：www.high-made.com

ZHANGZHOU HIGH MADE MACHINERY ELECTRONICS CO., LTD /

ADD: NO.22 HEMING ROAD LANTIAN ECONOMIC DEVELOPMENT

ZONE ZHANGZHOU 363007 FUJIAN PROVINCE CHINA /

TEL: +86 596 6175566 / FAX: +86 596 6180906

EMAIL: ENOCH@HMPACKINGMACHINE.COM /

WWW.HMPACKINGMACHINE.COM



官网号二维码



公众号二维码